

LYKO

AUTONOMOUS ENERGY UNITS


AIMU-900

Fuel-less autonomous energy unit

DESIGNED FOR HARSH ENVIRONMENT
REMOTELY MANAGEABLE CONTINUOUS POWER

LYKO
AUTONOMOUS ENERGY UNITS

ANMU-900

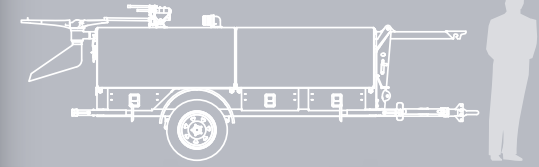

SPECIFICATIONS

- 560W solar array
- 350W Superwind wind turbine
- Thermally insulated battery system, capable of storing up to 36 kWh (24V or 48V)
- Battery system with temperature control
- Optional battery charger (25A or 60A)
- Puncture-proof urethane filled tires
- Tough frame
- 15' solid mast
- Automotive industry standard cabling and connectors; UV resistant and extreme weather ready - temperature rating of -40°C to 70°C
- Modbus RS485 and Ethernet network interfaces
- Status and logs accessible via Web browser
- Multicolored stroboscope
- Total weight with 4 batteries: 2900 pounds
- Height with mast down: 67"
- Overall length: 166"
- Width: 79"

1 877 377-4441
info@lyko.ca

lyko.ca